

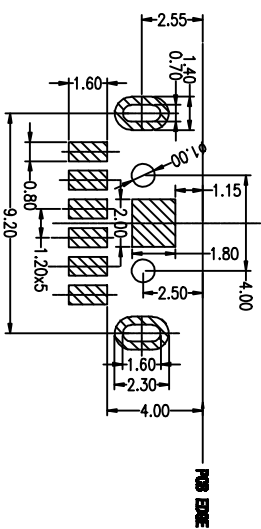



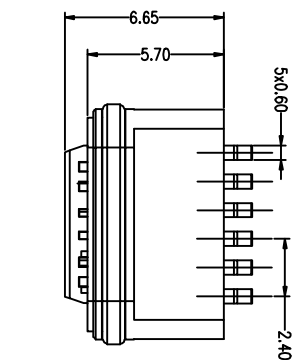



MAPX	MODIFICATION	DATE
------	--------------	------



POS LAYOUT 图仅供参考



- Note:
- Material:
 - Housing: PA9T
 - Contact: C5191 t=0.20mm
 - Shell: Kirsite
 - ELECTRICAL:
 - CURRENT RATING: VBUS AND GND CONTACTS RATED AT 1.25A PARALLELED FOR A TOTAL OF 5A;
 - INITIAL CONTACT RESISTANCE :40 MEGOHMS
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC MIN;
 - MECHANICAL CHARACTERISTICS:
 - MATING FORCE: 5~20N
 - UNMATING FORCE: 8~20N(INITIAL), 6~20N(AFTER 10000 CYCLES)
 - FREQUENCY: 200±50 CYCLES /HOUR, 10000 CYCLES
 - OPERATING TEMPERATURE : -40~80°
 - WATERPROOF: IP-X7.

产品图

深圳市精拓金电子有限公司

公差一览表		制图		制图料号	
TOLERANCE UNLESS OTHERWISE		DRAWING		PART NO.	
X	±0.30 X	MM	YANG	918-41830289-0000	
X	±0.25 X	比例	郭志富	产品名称	
.XX	±0.15 .XX	日期	美国荣	角法	
.XXX	±0.10 .XXX	2019.11.23	核准	版本	A0
				图例	
				审核	
				日期	
				图例	
				图例	