


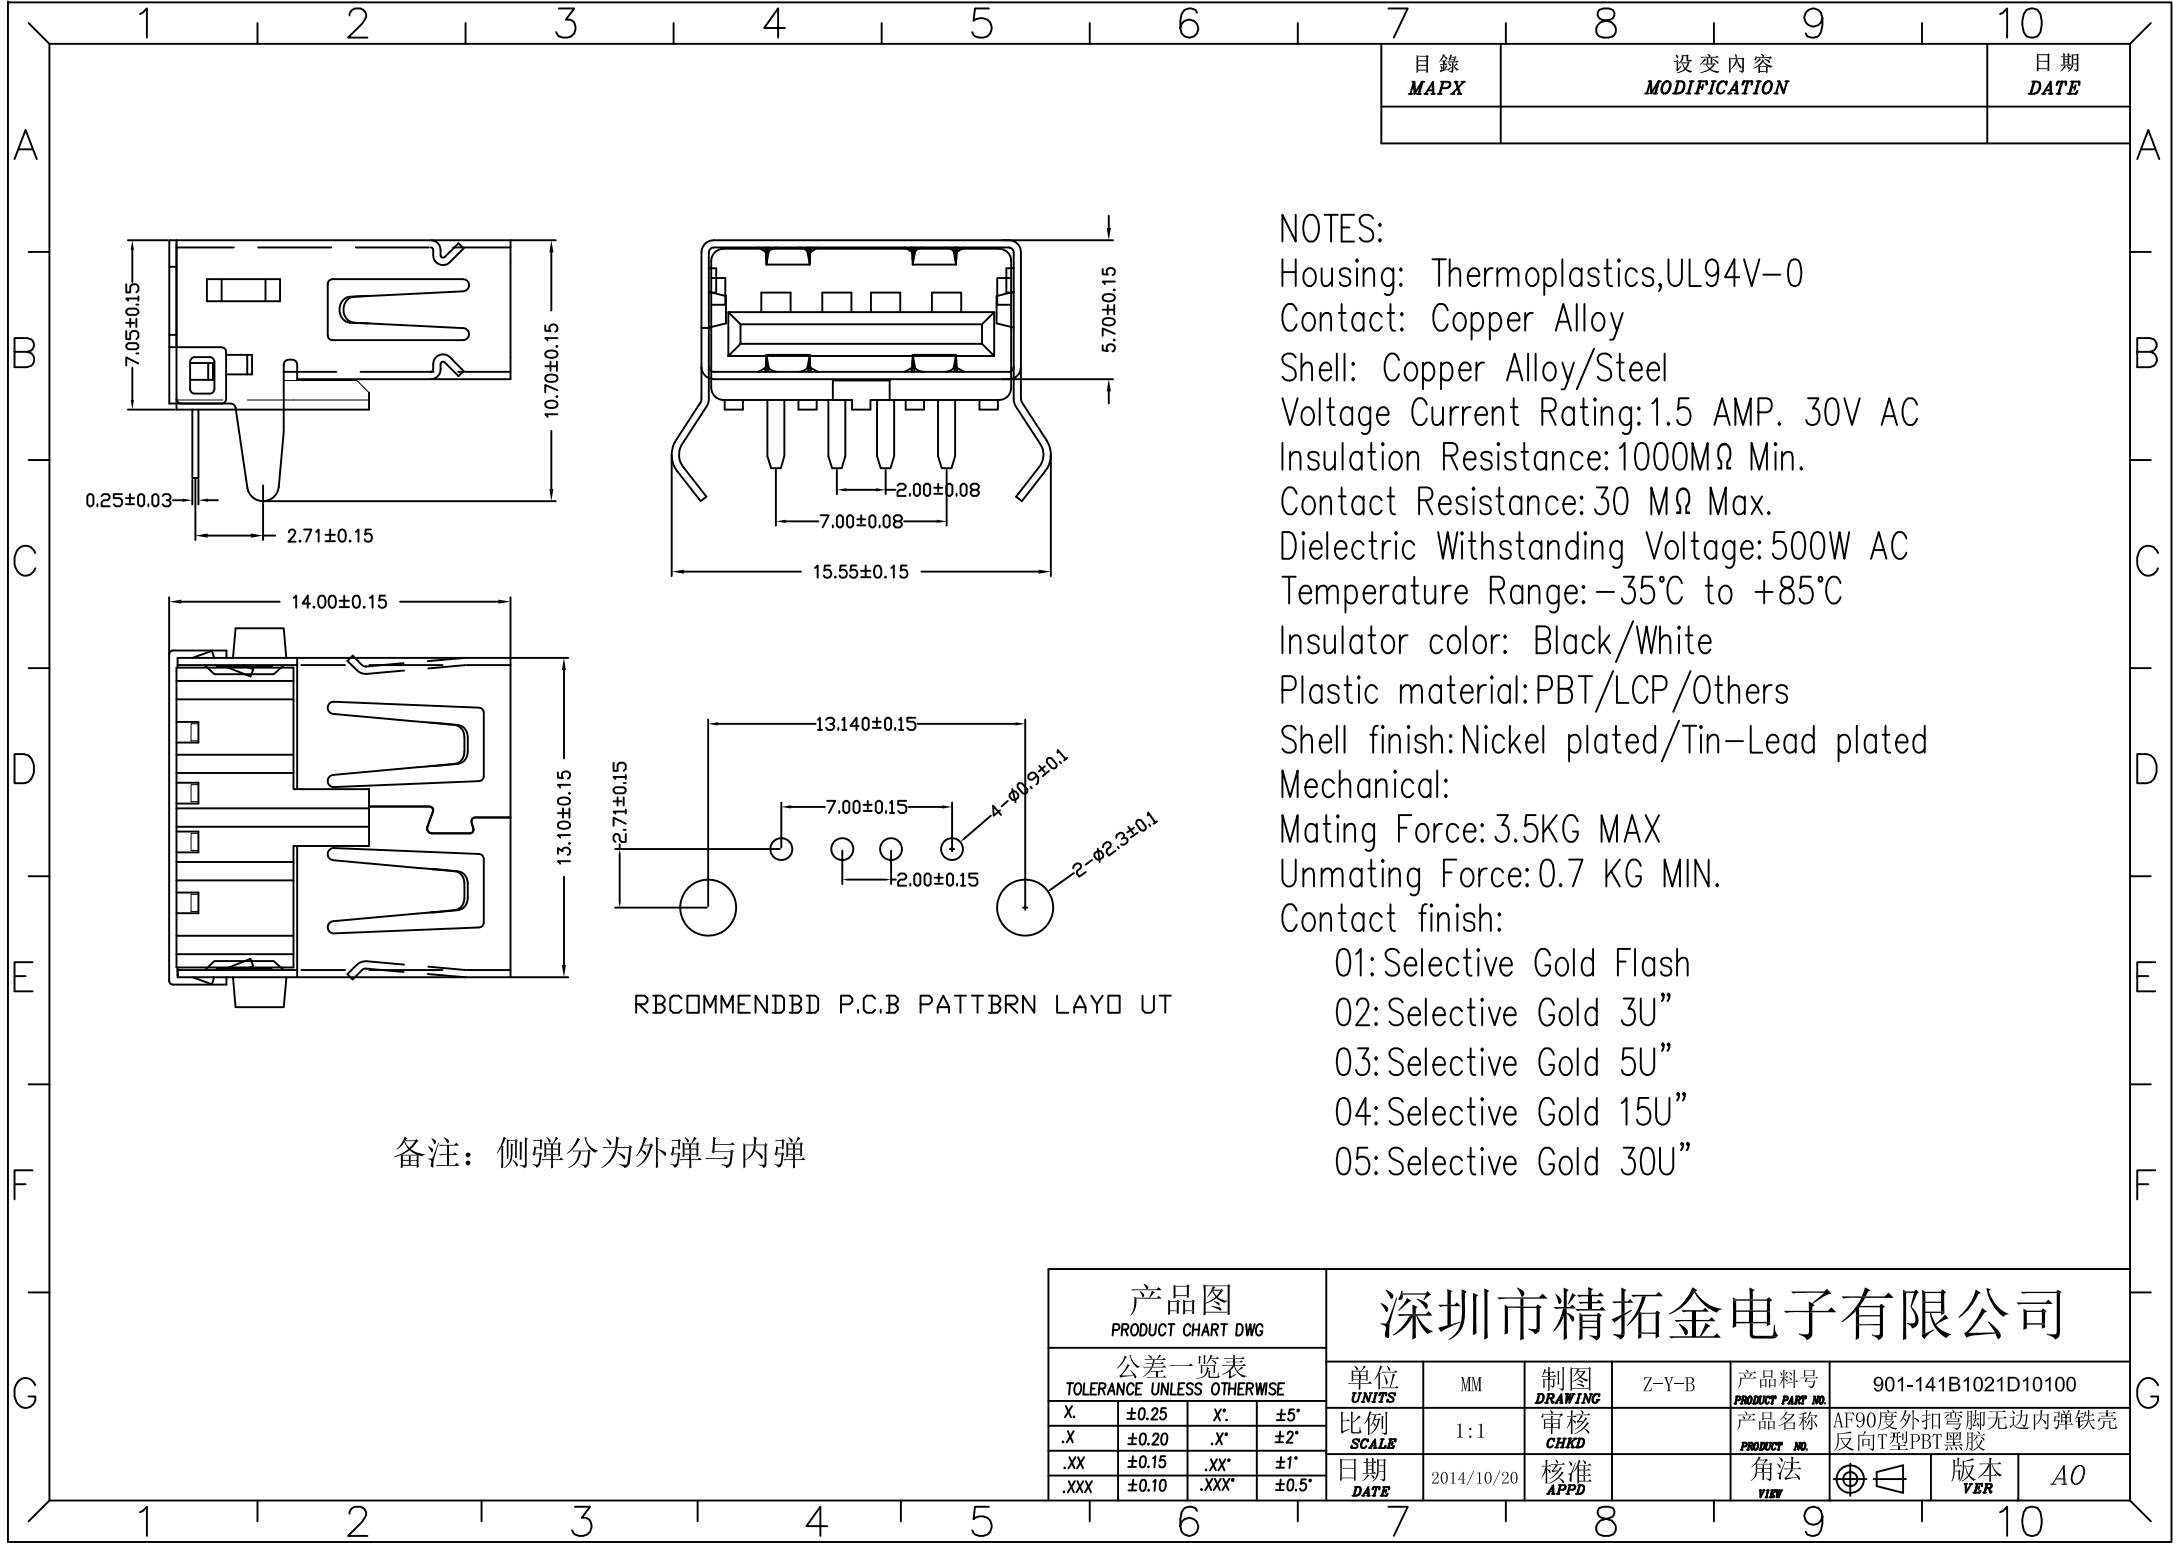

RBCOMMENDBD P.C.B PATTBRN LAYD UT

备注：侧弹分为外弹与内弹

| 目錄<br>MAPX | 設 變 內 容<br>MODIFICATION | 日 期<br>DATE |
|------------|-------------------------|-------------|
|            |                         |             |

NOTES:  
Housing: Thermoplastics,UL94V-0  
Contact: Copper Alloy  
Shell: Copper Alloy/Steel  
Voltage Current Rating:1.5 AMP. 30V AC  
Insulation Resistance:1000MΩ Min.  
Contact Resistance:30 MΩ Max.  
Dielectric Withstanding Voltage:500W AC  
Temperature Range:-35℃ to +85℃  
Insulator color: Black/White  
Plastic material:PBT/LCP/Others  
Shell finish:Nickel plated/Tin-Lead plated  
Mechanical:  
Mating Force:3.5KG MAX  
Unmating Force:0.7 KG MIN.  
Contact finish:  
01:Selective Gold Flash  
02:Selective Gold 3U"  
03:Selective Gold 5U"  
04:Selective Gold 15U"  
05:Selective Gold 30U"

| 产 品 图<br>PRODUCT CHART DWG          |       | 深 圳 市 精 拓 金 电 子 有 限 公 司 |       |               |            |                          |                                      |
|-------------------------------------|-------|-------------------------|-------|---------------|------------|--------------------------|--------------------------------------|
| 公差一览表<br>TOLERANCE UNLESS OTHERWISE |       | 单位<br>UNITS             | MM    | 制图<br>DRAWING | Z-Y-B      | 产品料号<br>PRODUCT PART NO. | 901-141B1021D10100                   |
| X.                                  | ±0.25 | X'.                     | ±5'   | 比例<br>SCALE   | 1:1        | 审核<br>CHKD               | 产品名称<br>AF90度外扣弯脚无边内弹铁壳<br>反向T型PBT黑胶 |
| .X                                  | ±0.20 | .X'                     | ±2'   | 日期<br>DATE    | 2014/10/20 | 核准<br>APPD               | 角法<br>VIEW                           |
| .XX                                 | ±0.15 | .XX'                    | ±1'   |               |            |                          | 版本<br>VER                            |
| .XXX                                | ±0.10 | .XXX'                   | ±0.5' |               |            |                          | A0                                   |