
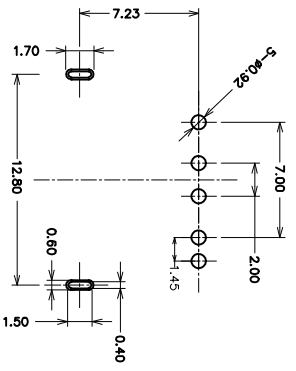







ROHS

1 2 3 4 7 8 9 10

MAPX	MODIFICATION	DRW	DATE



RECOMMEND P.C.B LAYOUT  
TOLERANCE: ±0.10



- NOTES:
1. MATERIAL SPECIFICATION:
    - 1) INSULATION MATERIAL: THERMOPLASTIC HALOGENFREE.
    - 2) SHELL: COPPER ALLOY T: 0.30mm  
PLATING: NICKEL
    - 3) TERMINAL: COPPER ALLOY T: 0.25mm  
PLATING: GOLD/TIN PLATED;
  2. ELECTRICAL CHARACTERISTIC:
    - 1) INSULATION RESISTANCE: 1000M Ω MIN;
    - 2) CONTACT RESISTANCE: 30m Ω MAX;
    - 3) WITHSTANDING VOLTAGE: 500V AC;
  3. MECHANICAL CHARACTERISTICS:
    - 1) INSERTION FORCE: 3.57kgf Max;
    - 2) EXTRACTION FORCE: 1.02kgf Min;

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

产品图

深圳市精拓金电子有限公司  
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

PRODUCT CHART DWG		制图		制图号	
公差一览表		审核		909-1622A2021D10100	
TOLERANCE UNLESS OTHERWISE		审核		产品名称	
X.	±0.35	X.	±5.°	JY10 098体(57)10脚贴片式连接器(2P) 规格: 010P	
X.	±0.20	X.	±2.°	PRODUCT NO.	
.XX	±0.15	XX	±1.°	角法	
.XXX	±0.05	.XXX	±0.5°	版本	
DATE		批准		VER	
2016-08-08		黄国梁		A0	

1 2 3 4 7 8 9 10

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作