


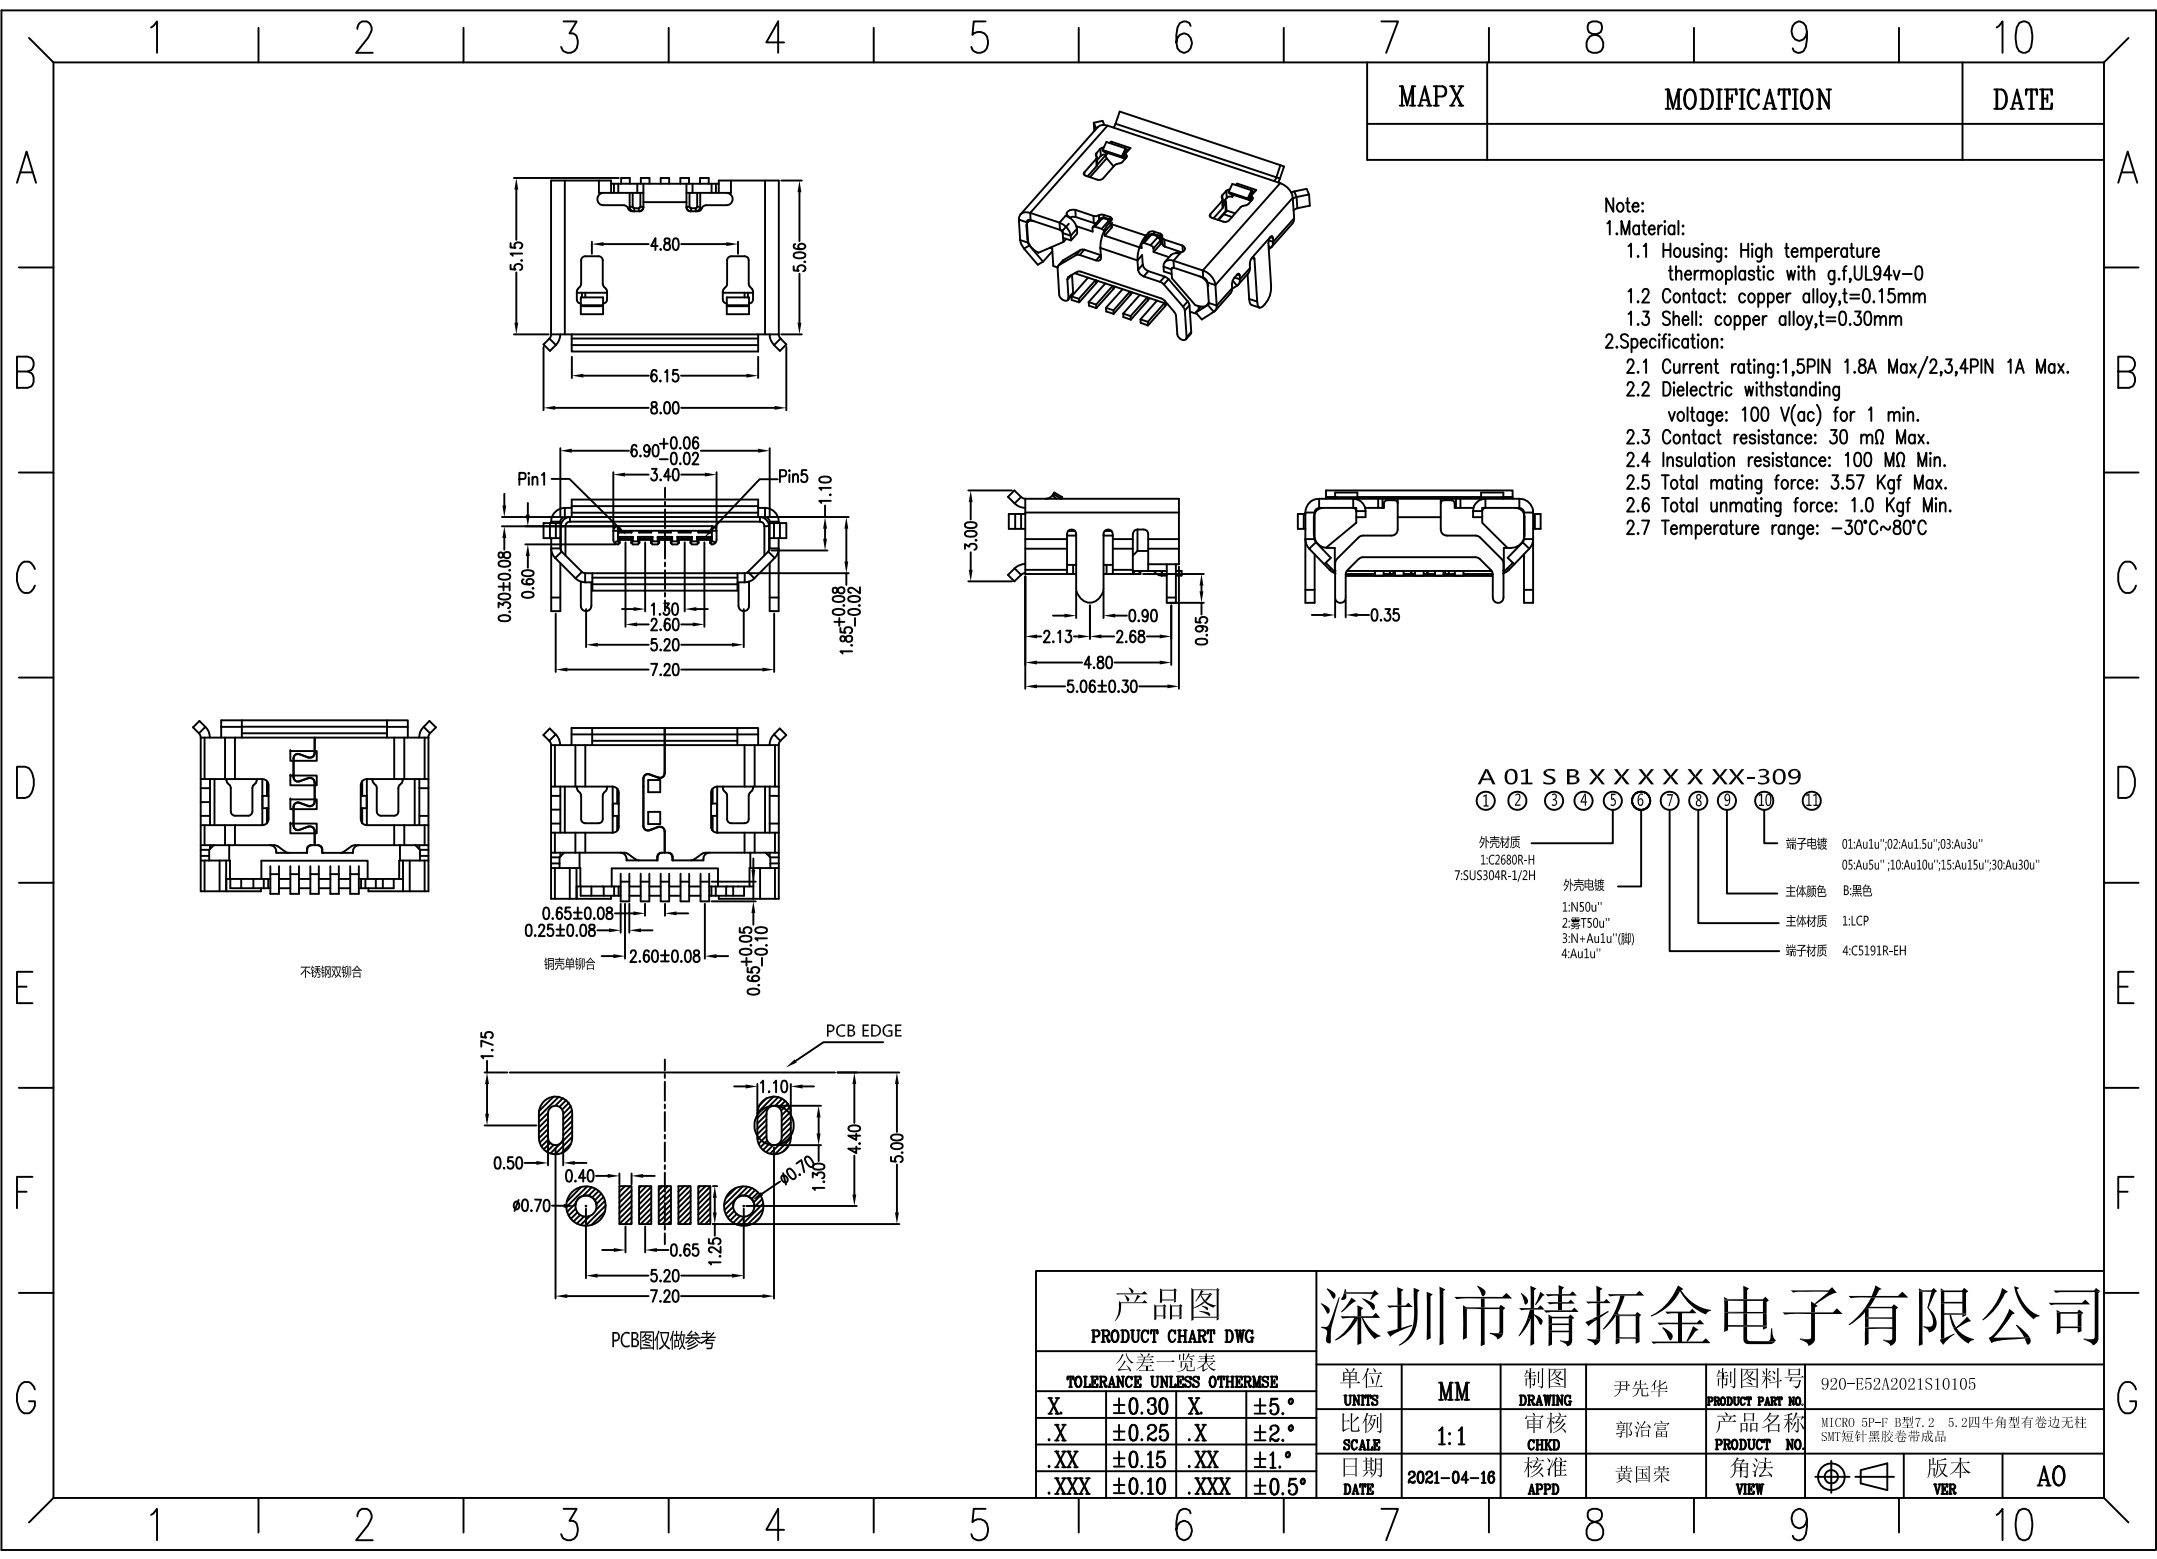

MAPX	MODIFICATION	DATE

- Note:
- 1.Material:
- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
 - 1.2 Contact: copper alloy,t=0.15mm
 - 1.3 Shell: copper alloy,t=0.30mm
- 2.Specification:
- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
 - 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - 2.3 Contact resistance: 30 mΩ Max.
 - 2.4 Insulation resistance: 100 MΩ Min.
 - 2.5 Total mating force: 3.57 Kgf Max.
 - 2.6 Total unmating force: 1.0 Kgf Min.
 - 2.7 Temperature range: -30°C~80°C

A 01 S B X X X X X X X X -309										
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪
外壳材质			外壳电镀			端子电镀		主体材质		
1:C2680R-H			1:N50u"			01: Au1u";02: Au1.5u";03: Au3u"		B: 黑色		
7:SUS304R-1/2H			2: 雾T50u"			05: Au5u";10: Au10u";15: Au15u";30: Au30u"		1: LCP		
			3: Ni+Au1u"(脚)					4: CS191R-EH		
			4: Au1u"							

产品图		深圳市精拓金电子有限公司							
PRODUCT CHART DWG									
公差一览表									
TOLERANCE UNLESS OTHERWISE									
X	±0.30	X	±5.°	单位	MM	制图	尹先华	制图料号	920-E52A2021S10105
.X	±0.25	.X	±2.°	UNITS		DRAWING		PRODUCT PART NO.	
.XX	±0.15	.XX	±1.°	比例	1:1	审核	郭治富	产品名称	MICRO 5P-F B型7.2 5.2四牛角型有卷边无柱
.XXX	±0.10	.XXX	±0.5°	SCALE		CHKD		PRODUCT NO.	SMT短针黑胶卷带成品
		日期	2021-04-16	核准	黄国荣	角法		版本	AO
		DATE		APPD		VIEW		VER	