

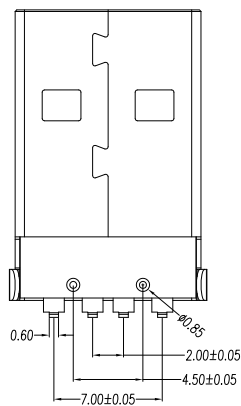

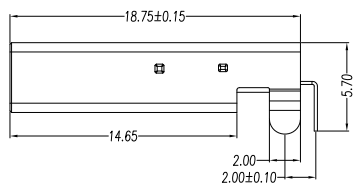




MAPX	MODIFICATION	DATE



规格型号: Specifications:
 电气特性: Electrical:
 1. 额定电流: Current Rating
 1.5A/contact terminal
 2. 额定电压: Voltage Rating
 30V DC
 3. 接触阻抗: Contact Resistance
 30 milliohms MAX
 4. 耐电压: Dielectric Withstanding Voltage:
 500 V AC AT Sea Level
 5. 阻抗: Lnsulation Resistance:
 1000MEGA ohms MIN

物理性能: Mechanical:
 1. 插拔力: Cnnector Mate and Unmate Force
 Mate force: 3.57kgf(MAX)
 Unmate force: 1.02kgf(MIN)
 2. 端子保持力: Terminal Retention
 1.0kgf(MIN)

原材料: Matorial:
 1. 塑膠: Housing:
 Hing Temperature Thermoplastics,
 PBT\LCP White/Black
 2. 端子: Contact: Copper Alloy C2680
 3. 外壳: Shell: Copper Alloy C2680/SPCC

1. 端子: Contact: Plated Gold in Mating Area;
 Tin On Solder Talls
 端子四周鍍 50U"(MIN)錫
 2. 外壳: Shell:
 銅殼四周鍍 80U"(MIN)錫
 Nickel Plating

产品图 PRODUCT CHART DWG		深圳市精拓金电子有限公司							
公差一览表 TOLERANCE UNLESS OTHERMSE		单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	917-181A102ED60200		
X.	±0.30	X.	±5.°	比例 SCALE	郭治富	产品名称 PRODUCT NO.	AM/90度弯脚铁壳有柱黑胶24H<YLD>		
.X	±0.25	.X	±2.°	日期 DATE	黄国荣	角法 VIEW	版本 VER	AO	
.XX	±0.15	.XX	±1.°						
.XXX	±0.10	.XXX	±0.5°						