
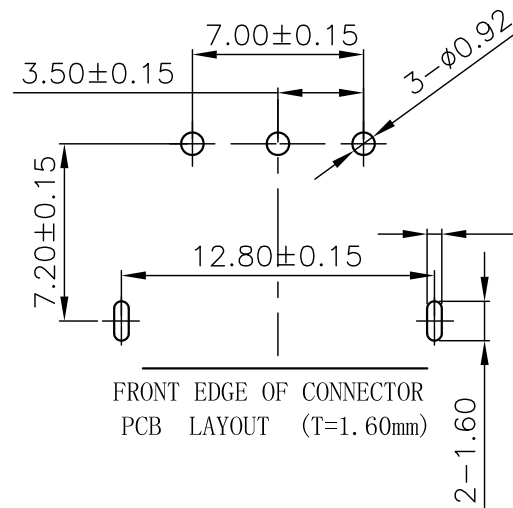


| SYM | ECN No. | MODIFICATION | DATE | ISSUED |
|-----|---------|--------------|------|--------|
|     |         |              |      |        |



Note:

1.Material:

1.1,Housing: High temperature thermoplastic with/black G/F,UL94v-0

1.2,Contact: copper alloy,t=0.25mm

1.3,Shell: copper/Ferroalloy alloy,t=0.30mm

2.Specification:

2.1,Current rating:1.5A Max.

2.2,Dielectric withstanding voltage: 100 V(ac) for 1 min.

2.3,Contact resistance: 30 mΩ Max.

2.4,Insulation resistance: 100 MΩ Min.

2.5,Total mating force: 3.57 Kg Max.

2.6,Total unmating force: 1.0 Kg Min.

3.Finish:

3.1,Contact: Plated Gold in Mating Area:  
Tin On Solder Tails

Shell: Nickel Plating

4.Environmental:

4.1,Temperature range: -55°C~85°C

PART ON:

912-12XAXXXAD1XX

电镀规格: 11, 镀金1u" 13, 镀金3u"  
15, 镀金15u" 16, 镀金30u"

端子材质: 1, 青铜 2, 磷铜

端子规格: D, 90度 Y, 180度 S, SMT贴片

塑胶形态: 1=6.2有耳朵 2=6.5有耳朵 3=6.8有耳朵

4=5.7有耳朵 5=6.0有耳朵 6=6.2无耳朵 7=6.5无耳朵

8=6.8无耳朵 9=6.0有耳朵短路 A=6.2无耳朵2.3短路

B=6.5反向单柱0.8 C=6.0无耳朵MJ

塑胶颜色: 01, 白色 02, 黑色 03, 本色

塑胶材质: 1, PBT 2, LCP 3, PA9T 4, PPA 5, PA6T

对插方向: A, 正向 B, 反向




外壳材质: 1, 铁壳 2, 铜壳

插口类型: 1=有边方弹 2=无边方弹 3=有边尖弹

4=无边尖弹 5=无边大小弹

外壳脚型: 1, 前两脚 2, 后两脚 3, 四脚 4, 无脚

类别: D款10.0系列

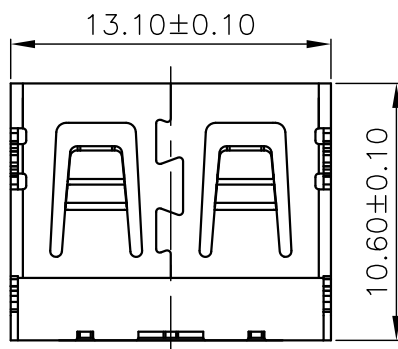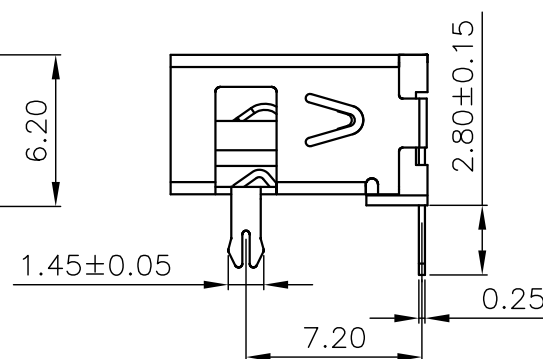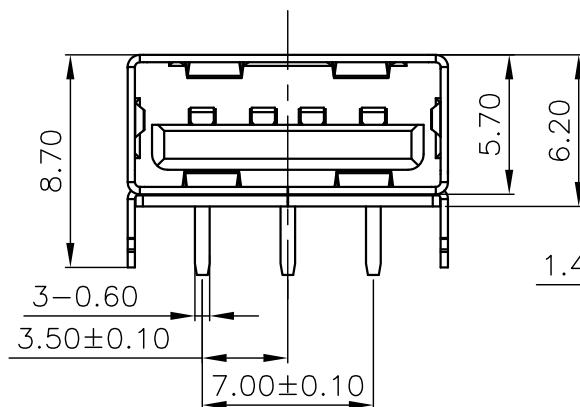

|   |                    |   |  |
|---|--------------------|---|--|
| 1 | 912-121B1015D10101 | 5 |  |
| 2 |                    | 6 |  |
| 3 |                    | 7 |  |
| 4 |                    | 8 |  |

DRAWN

JH 深圳市精拓金电子有限公司

CHECKED

TITLE

AF10. 6D款前两脚无边方弹铁壳

PART NO.


912-121B1015D10101

APPROVED

反向一型PBT白胶DIP2-3短路

DRAWING NO.

R912121A101AD102



3rd ANGLE PROJECTION

UNIT

mm

TOLERANCE

.XXX±.10, .XX±.20, .X±.25, ANG±5°

SCALE

1:1

SHEET

1 OF 1

SIZE

A4

REV.

X1