


A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



NOTES:

1. MECHANICAL: MATING FORCE: 5-20N .
UNMATING FORCE: 8-20N .
DURABILITY: 10000 CYCLES MIN.

2. ELECTRICAL:
CURRENT: 5.0A MAX
VOLTAGE: 20V MAX
WITHSTANDING VOLTAGE: 100V AC
CONTACT RESISTANCE: 40 mΩ MAX INITIAL;
50 mΩ MAX AFTER 10000 CYCLES

3. ENVIRONMENTAL:
OPERATING TEMPERATURE RANGE -30° C ~ +80° C

4. Salt Spray: 48H

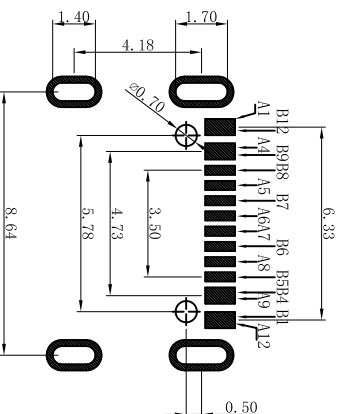

BOM	
序号	名称
1	Terminal C7025 TM02 T=0.15mm 电镀合金 Au:6F Ni:500"
2	Terminal C7025 TM02 T=0.15mm 电镀合金 Au:6F Ni:500"
3	Molding 1 LCP+30%G.F黑色 U194 V-0
4	Molding 2 LCP+30%G.F黑色 U194 V-0
5	Molding 3 LCP+30%G.F黑色 U194 V-0
6	Shell 1 SUS301 1/2H T=0.30mm Ni:500"

产 品 图
PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE		单位	制图	产品料号
X	±0.35	X"	±5°	918-418K2023S40038
X	±0.50	X"	±3°	产品名称
.XX	±0.25	.XX"	±1°	TYPE: 0.5mm 板上型 35度脚 0.5mm 焊有注 16P/N
.XXX	±0.20	.XXX"	±0.5°	角法
日期		2022/05/10	审核	版本
日期		2022/05/10	黄国荣	A0
日期		2022/05/10	黄国荣	A0