

1

2

3

4

5

6

7

8

9

10

RoHS

12.00

12.02


15.00

20.00

7.98

7.10

4.50

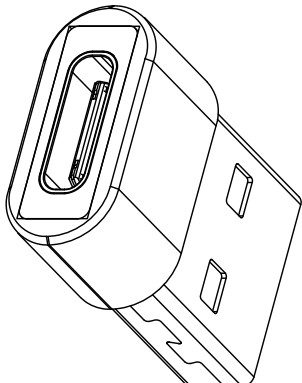

MAPX

MODIFICATION

DRW

DATE

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C

7	SHELL	塑料 (聚碳酸酯)	BLACK (可订制)	1PCS
6	SHELL	SPCC	NI Plated	1PCS
5	CONTACT	PCB (镀银导电胶)	Au20"	1SET
4	HOUSING	PBT	BLACK	1PCS
3	SHELL	STAINLESS STEEL	NI Plated	1PCS
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

产品图

PRODUCT CHART DWG

深圳市精拓金电子有限公司

Shenzhen Jing Tuo Jin Electronics Co., Ltd.

公差一览表				单位		制图		制图料号	
TOLERANCE UNLESS OTHERWISE				UNITS		DRAWING		PRODUCT PART NO.	
X	±0.25	X	±5°	MM		审核		917-B88C101AH70203	
X	±0.20	X	±2°	1:1		郭治富		产品名称	
XX	±0.05	XX	±1°	SCALE		CHKD		转接头TYPE-C母头转USB2.0公头	
XXX	±0.02	XXX	±0.5°	DATE		APPD		角法	
				2020-05-22		核准		黄国荣	
								VER	
								AD	