

1

2

3

4

5

6

7

8

9

10

RoHS

12.00

12.02


15.00

20.00

7.98

7.10

4.50

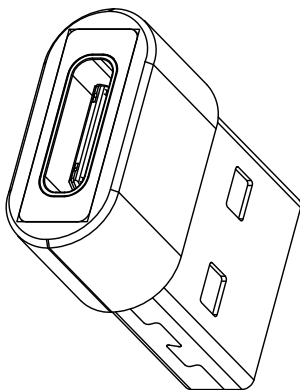

MAPX

MODIFICATION

DRW

DATE

NOTES:

SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- VOLTAGE: 100 VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C

7	SHELL	塑料 (聚碳酸酯)	BLACK (可订制)	1PCS
6	SHELL	SPQC	NI Plated	1PCS
5	CONTACT	PCB (镀金导电层)	Au20"	1SET
4	HOUSING	PBT	BLACK	1PCS
3	SHELL	STAINLESS STEEL	NI Plated	1PCS
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

产品图

PRODUCT CHART DWG

深圳市精拓金电子有限公司

Shenzhen Jing Tuo Jin Electronics Co., Ltd.

公差一览表

TOLERANCE UNLESS OTHERWISE	单位	制图	制图料号
X. ±0.25	X. ±5°	MM	917-B88C101AHT0200
X. ±0.20	X. ±2°	1:1	产品名和 转接头TYPE: (母头转A2.0) (20.15白胶/黑铝壳)
XX ±0.05	XX ±1°	日期	角法
XXX ±0.02	XXX ±0.5°	DATE 2020-05-22	VER AD
		核准	版本
		APPD	AD